


TRESU L5 / L5-F Coating Circulator



- **L5: For UV and Aqueous coatings**
L5-F: For Aqueous coatings
- **Compact design - fit under the gallery of the press**
- **PLC Controlled operation by remote control**
- **Simply & Safe: Sensor controlled coating circulation with alarm system**
- **Operator and maintenance friendly**
- **L5-F: With tap water connection for automatic cleaning**

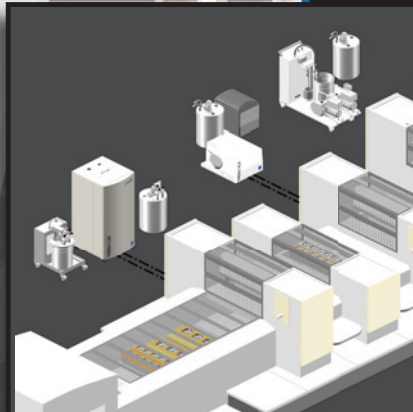

Technical Specifications

Height:	365 mm
Width:	470 mm
Depth:	652 mm
Weight:	75 kg
Operation temperature:	10 - 40°C
Air supply:	Min. 6 bar - Max. 10 bar, clean and dry
Voltage:	100 - 240 V, 50/60 HZ
Ampere:	2,0/2,0A
Max. fuse protection:	10A
Power:	0,5/1,0kW
Sensors (Standard):	Alarm light, pan sensor high
Pan sensor low:	Option

- the printer's choice -

TRESU A/S

Eggsvej 14-16 . DK 6091 Bjert
Tel.: +45 76 32 35 00 . Fax: +45 76 32 35 10

tresu@tresu.com · www.tresu.com

A510EN0805

