


TRESU XL1 Coating Circulator

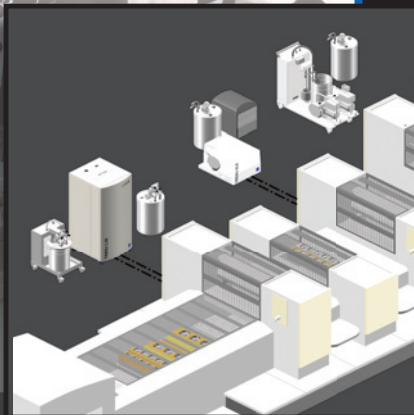

- *Peristaltic pump for continuously adjustable and soft treated coating supply*
- *Ideal for tests or as a back-up system*
- *Easy to install - plug and play*
- *For all kinds of coatings*
- *In case of no constant pull in return line, two XL1 are recommended*

Technical Specifications

Height:	440 mm
Width:	265 mm
Depth:	430 mm
Voltage:	100 - 200 V, 50/60 Hz
Inks/coating:	Aqueous and UV

- the printer's choice -

TRESU A/S

Egsvej 14-16 . DK 6091 Bjert
Tel.: +45 76 32 35 00 . Fax: +45 76 32 35 10

tresu@tresu.com · www.tresu.com

A514EN0805

