
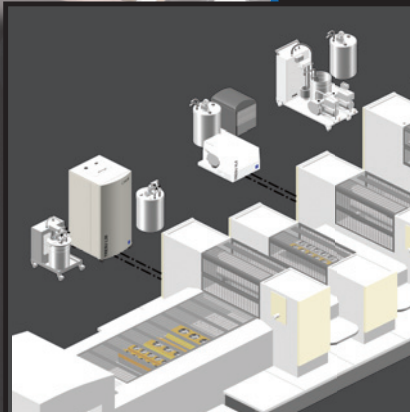


# TRESU XL5 / -P Coating Circulator

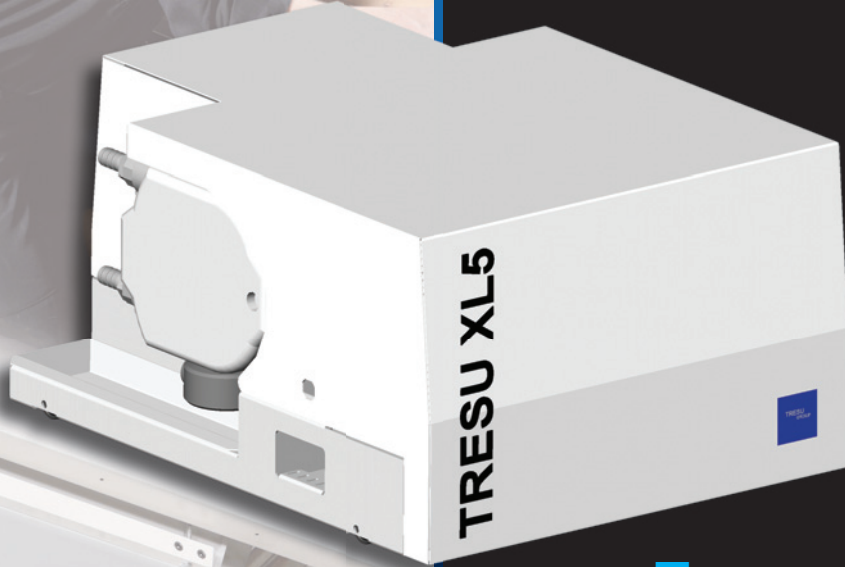

- *For all UV and aqueous standard and special application coatings*
- *Compact system with two speed controlled peristaltic pumps*
- *Sensor controlled with alarm light, pan, chamber closed and hose break sensor*
- *Easy to operate by remote control*
- *Upgrade to pressure controlled circulation possible (option -P)*
- *Automatic and adjustable timer for cleaning and emptying*

## Technical Specifications

Height:	365 mm
Width:	600 mm
Depth:	665 mm
Weight:	75 kg
Voltage:	200 - 400 V, 50/60 Hz
Inks/coating:	Aqueous and UV
Alarm light:	Standard
Pan sensor:	Standard
Sensor chamber closed:	Option
Pressure control (-P):	Option

*- the printer's choice -*

### TRESU A/S

Egsvej 14-16 . DK 6091 Bjert  
Tel.: +45 76 32 35 00 . Fax: +45 76 32 35 10

tresu@tresu.com · www.tresu.com

A515EN0805

