



TRESU XL20 / -RD / -RP

Coating Circulator & Conditioner

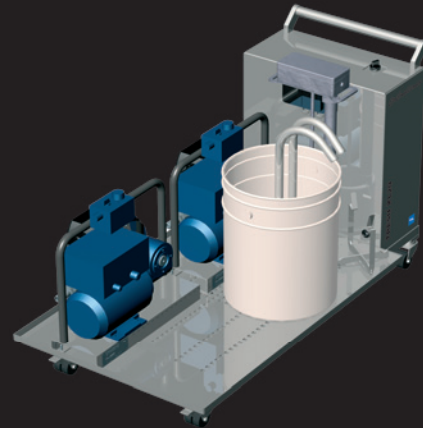

- **For any kind of standard and special effect coating**
- **Integrated heating system for UV coating**
- **Automatic refill system from main coating container to heated coating drum (option -RD / -RP)**
- **Peristaltic pump for continuously adjustable and soft treated coating supply**
- **Simply & Safe: Sensor controlled coating circulation with pan sensor and alarm light**
- **Intuitive user interface: Easy operation and maintenance**

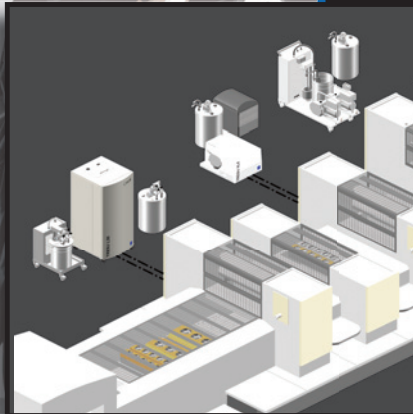

Technical Specifications

Height:	690 mm
Width:	590 mm
Depth:	1100 mm
Weight:	115 kg
Voltage:	200 - 230 V, 50/60 Hz
Alarm system:	Standard
Pan sensor high:	Standard
Sensor chamber closed:	Option
Inks/coatings:	Aqueous and UV

- the printer's choice -

TRESU A/S

Eggsvej 14-16 . DK 6091 Bjert
Tel.: +45 76 32 35 00 . Fax: +45 76 32 35 10

tresu@tresu.com · www.tresu.com

A516EN0805

