

TRESU XL20 · XL20-RD · XL20-RP

Coating circulator and conditioner






TRESU XL20 XL20-RD · XL20-RP

Coating circulator and conditioner

Movable circulator and conditioner for all standard-, and sensitive coatings

- Integrated heating system for UV-coating
- Peristaltic pump for continuously adjustable and soft treated coating supply
- Optional automatic refill systems from main coating container to heated coating drum
RP - refill by peristaltic pump
RD - refill by diaphragm pump
- Simple and safe - sensor controlled coating circulation with pan sensor and alarm light
- Easy operation and maintenance

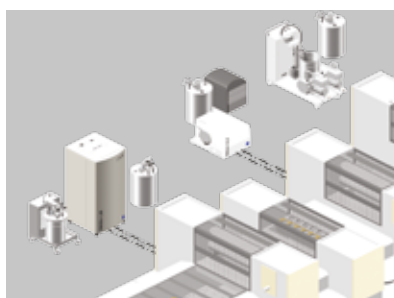

Special coating applications for offset and flexo

TRESU UniPrint Combi

Peristaltic pump in the coating circulator

Technical Specifications

Height	690 mm
Width	590 mm
Depth	1100 mm
Weight	115 Kg
Voltage	200 - 230 V · 50/60 Hz
Alarm system	Standard
Pan sensor high	Standard
Sensor chamber closed	Option
Inks/coatings	Aqueous and UV



The Best Part of Innovation

A-19-GB-04.12

TRESU Group

14-16, Eegsvej
DK-6091 Bjert
Tel: +45 76 32 35 00
Fax: +45 76 32 35 10
tresu@tresu.com
www.tresu.com